




FLASHING

MASONRY

Cop R Tex

The superior qualities of copper are protected during installation with sheet of heavy, creped kraft paper, asphalt bonded to one side of the copper. This is an economical product that still provides a permanent waterproofing solution. It is ideal for curtain wall and frame construction. Cop R Tex Flashing is available with 2 or 3 ounces of copper per square foot. Supplied in 60 lineal foot rolls.



No.	Description	Wt (lbs)	Qty/Ctn
WC 30Z12	30Z x 12"	13.5	3
WC 30Z18	30Z x 18"	20.0	2
WC 30Z36	30Z x 36"	40.0	1

Copper Fabric


Copper Fabric Flashing is permanently bonded together with a polymer modified asphalt to provide permanent protection under all thru-wall conditions. The copper sheet is asphalt coated on both sides and bonded under high pressure between two layers of high tensile fiberglass fabric. A light and flexible flashing that is rigid enough to maintain its shape when formed and installed at the job sites. Available in 3 or 5 ounces of copper per square foot. Copper Fabric Flashing is supplied in 25 lineal foot rolls.

No.	Description	Wt (lbs)	Qty/Ctn
WC 30ZCFF12	30Z x 12"	12.0	3
WC 30ZCFF18	30Z x 18"	18.0	2
WC 30ZCFF36	30Z x 36"	36.0	1
WC 50ZCFF12	50Z x 12"	15.0	3
WC 50ZCFF18	50Z x 18"	30.0	2
WC 50ZCFF36	50Z x 36"	45.0	1
WC 70ZCFF12	70Z x 12"	18.0	3

Flashing Cement

An asphalt modified cement for bonding copper flashing to itself and to modified bituminous membranes. A custom blend of rubber, refined asphalt, solvents and thixotropic additives, augmented with reinforcing fibers. Apply cold by trowel. Cures to a tough, flexible waterproof barrier and adhesive for long term performance. Resistant to ultra violet and chemical attack. It is a non-asbestos formula. Meets ASTM D-4586-86, Type 1.

No.	Size	Wt (lbs)
WC 5GTITE	5 gal. pail	42.0

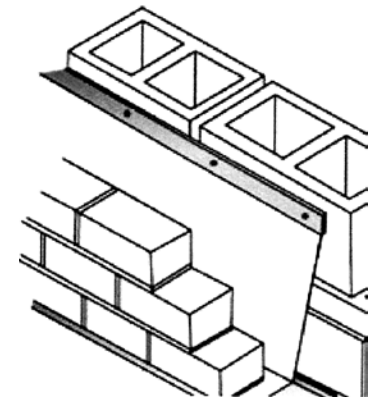

Aluminum Termination Bar

No.	Size	Wt (lbs)	Pcs/Tube
CT TERMBAR	1" x 10'	1.0	50

Aluminum Termination Bar (With sealant ledge)

No.	Size	Wt (lbs)	Pcs/Tube
CT TERMSL	1" x 10'	1.0	50

