


COIL THREAD

TIEING/HANDSET

Coil Coupler

Provides an efficient and safe alternative to conventional forming of protruding coil rod. Allows for fast stripping and worker safety by completing the splice at a later time.


No.	Size	SWL Tension (lbs)	Wt (lbs)
DS 12CC	1/2"	9,000	0.20
DS 34CC	3/4"	18,000	0.40
DS 1CC	1"	38,000	1.50



Cast Wing Nut

The cast wing nut is available in all diameters. It is fabricated from ductile steel. Utilized when frequent removal and application of a nut is required.

No.	Size	SWL Tension (lbs)	Wt (lbs)
DS 34WN	3/4"	18,000	0.90
DS 1WN	1"	38,000	1.07
DS 114WN	1-1/4"	52,000	1.22
DS 112WN	1-1/2"	80,000	2.86

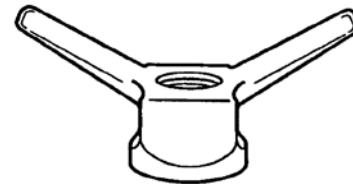

Washer

Washers are used with all sizes of bolts and rod. The washers are fabricated from carbon steel.

No.	Size	Wt (lbs)
CT 12WASH	1/2"	0.04
CT 58WASH	5/8"	0.08
CT 34WASH	3/4"	0.11
CT 1WASH	1"	0.17
CT 114WASH	1-1/4"	0.21



SWL provides a factor of safety of approximately 2 to 1.