


# DYWIDAG THREAD

## TIEING/HANDSET

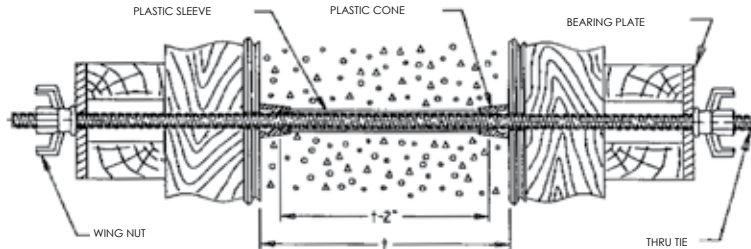

### Threadbar®

Threadbar is hot-rolled, high strength steel with two flat sides in the thread pattern that allow gripping and turning of the bars with a crescent wrench. The flat sides facilitate self-cleaning with each stripping operation. Threadbar® is bendable around a 6 diameter pin.

No.	Size	SWL Tension (lbs)	Wt/Lf (lbs)
DSI 78TB	7/8"	39,200	1.7
DSI 58TB	5/8"	19,100	1.0



### DCR Bar

The DCR is manufactured from high strength steel and fully threaded. DCR bar is considered more ductile than standard coil rod. DCR Bar is bendable around a 6 diameter pin and is also weldable allowing its use for welded waterstop. DCR bars provide a very economical solution for conventional and special tying/anchoring application. All hardware is interchangeable with thread bar.



No.	Size	SWL Tension (lbs)	Wt/Lf (lbs)
DSI 58DCR	5/8"	18,400	1.0



### Push-Fit Cones

This spreader cone is used with 3/4", class 200 PVC pipe to allow 5/8" threaded rod to pass through the concrete untouched.

No.	Wt (lbs)	Qty/Ctn
DS 34PF	0.15	500



SWL provides a factor of safety of approximately 2 to 1.