




# DW-10 Series Veneer Anchors

## DW-10HS® ANCHOR SYSTEM

04082/HOH  
BuyLine 1823

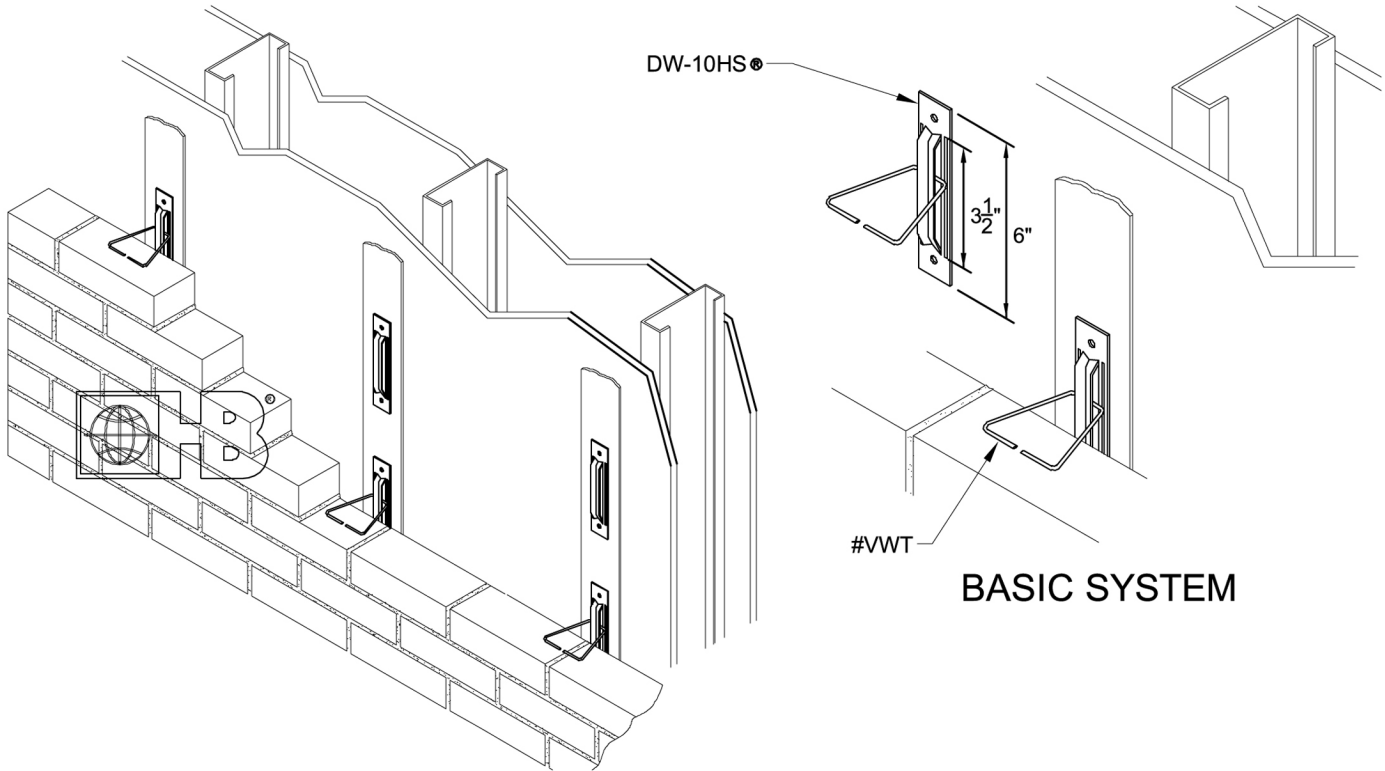

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

**WIRE (Carbon Steel):**

Cold-drawn steel wire conforming to ASTM A 82:  
Tensile strength - 80,000 p.s.i.  
Yield Point - 70,000 p.s.i. minimum  
Zinc Coating:  
Hot-dip galvanized after fabrication: ASTM A 153 (1.5 oz/ft )  
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ff

**WIRE (Stainless Steel):**

ASTM A 580 - AISI Type 304. (Type 316 available on special order.)

**SHEET METAL (Carbon Steel):**

ASTM A 366  
Zinc Coating:  
ASTM A 153 Class B (sheet metal ties and anchors hot-dip galvanized after fabrication).  
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ff

**SHEET METAL (Stainless Steel):**

ASTM A 167 - AISI Type 304 Stainless Steel (sheet metal ties and anchors) (Type 316 available on special order).  
Note: H&B recommends Stainless Steel for maximum protection against corrosion.

**THICKNESS:**

- 14 Gauge
- 12 Gauge

**VEE TIE DIAMETER:**

- 3/16"Ø Standard
- 1/4"Ø Heavyweight

**VEE TIE LENGTH:**

- 3"    3 1/2"    4"    4 1/2"    5"
- OTHER LENGTH \_\_\_\_\_

**FINISH:**

- Hot Dip Galvanized
- Stainless Steel

We Anchor The World



Hohmann & Barnard, Inc.  
30 Rasons Court  
Hauppauge, New York 11788  
TEL: (800) 645-0616 FAX: (631) 234-0683

WEBSITE: [www.h-b.com](http://www.h-b.com)  
E-MAIL: [weanchor@h-b.com](mailto:weanchor@h-b.com)

© HOHMANN & BARNARD, INC. - 1999