


## CHANNEL RADIUS

Rugged strong magnesium channel design. Unique design and various lengths let float adapt to many types of jobs, flat work, paving, etc. The float is 6" wide with 2" side walls and allows user to improve flatness of their work. Float will accept 2 hole or 4 hole bracket. Bracket assembly sold separately.

No.	Size	Wt (lbs)
TFW C48	48"	10.00
TFW C60	60"	12.00
TFW C72	72"	14.00
TFW C96	96" - Special Order	17.00

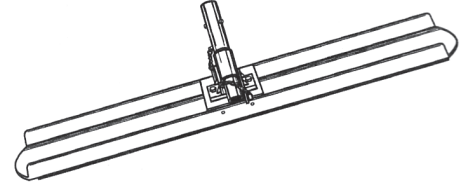

## HAND

No.	Size	Wt (lbs)
<b>Cork</b> - The plaster's favorite way to float.		
TFH C12	12" x 5" x 1/4"	1.50
<b>Hardwood</b> - Extra hard wood float. Outlasts ordinary wood and won't fuzz up. Harder than teak.		
TFH H16	16" x 3 1/2"	1.25
<b>Laminated Resin</b> - Wears like magnesium for extremely long wear. Laminated canvas-resin is 3/8" thick, has rounded corners and ready to use.		
TFH L12	12" x 3 1/2"	1.00
TFH L14	14" x 3 1/2"	1.25
TFH L16	16" x 3 1/2"	1.50
TFH L18	18" x 3 1/2"	1.50
TFH L20	20" x 3 1/2"	2.00
<b>Round End Laminated Resin</b>		
TFH L16R	16" x 3 1/2"	1.50
<b>Magnesium</b> - Most popular. The blade is made of very hard magnesium. The position of the wood handle gives the tool perfect balance. They are easy to clean, last longer and will not warp.		
TFH MT12	12" x 3 1/8"	1.50
TFH M16	16" x 3 1/4"	1.50
TFH MT16	16" x 3 1/8"	1.50
TFH MT20	20" x 3 1/8"	1.50
TFH M24	24" x 3 1/4"	1.50
<b>MT Floats available with Durasoft handle (add a "D" after code).</b>		

