

WATERSTOP




POUR IN PLACE

PVC


Our PVC Waterstop is made from new materials not reprocessed or reclaimed materials. Unaffected by normal range of concrete or concrete additives. Will not discolor concrete nor produce electrolytic action. Will perform over wide temperature ranges -35° to 175°F. PVC Waterstop is used where concrete is subject to hydrostatic pressure. Provides a positive seal to contain water above or below grade. PVC is most suitable for most common construction. For specific chemical resistance, please call. There are considerations when choosing a waterstop; hydrostatic pressure, wall thickness, type and size of joint, movement and chemical resistance. Dumbbell types and ribbed no center bulb styles are used where no joint movement is expected. Center bulb type can be used in both expansion

and construction joints subject to movement. Split Waterstop allows waterstop to be used easily in bulk head forming. For walls and slabs that are less than 9" thick, typically 4" to 6" waterstop is used. For thickness over 9", typically 9" is used. Waterstop irons must be used for all splicing requirements. See next page for splicing details. There are several important requirements for waterstop joints; Waterstop must be properly located and braced during concrete placement, center bulb on joints. Waterstop must be clean of foreign matter including concrete splatter. Must be properly vibrated and consolidated. Splices must be done right. Factory splices are available on request. Specifications: Corp of Engineers CRD C-572.


No.	Size	Description	Wt/Lf (lbs)	Lf/RL
GS 701	4"x3/16"	Ribbed Center Bulb Tapered	0.40	100
GS 702	4"x3/16"	Ribbed Center Bulb	0.74	50
GS 703	6"x3/16"	Ribbed Center Bulb Tapered	0.73	100
GS 705	6"x3/8"	Ribbed Center Bulb Tapered	1.19	50
GS 709	9"x3/8"	Ribbed Center Bulb Tapered	1.63	50
GS 721	4"x3/16"	Split Ribbed Center Bulb	0.50	100
GS 723	6"x3/16"	Split Ribbed Center Bulb	0.76	100
GS 724	6"x3/8"	Split Ribbed Center Bulb	1.54	50
GS 722	9"x3/8"	Split Ribbed Center Bulb Tapered	1.90	50
GS 732	6"x3/8"	Ribbed Center Bulb	1.60	50
GS 735	9"x3/8"	Ribbed Center Bulb	2.45	50
GS 741	4"x3/16"	Dumbbell	0.47	100
GS 746	6"x3/16"	Dumbbell	0.71	100
GS 747	6"x1/4"	Dumbbell	1.07	50
GS 748	6"x3/8"	Dumbbell	1.51	50
GS 751	9"x3/8"	Dumbbell	2.18	50
GS 759	6"x3/8"	Split Dumbbell	1.49	50
Many other sizes available.				

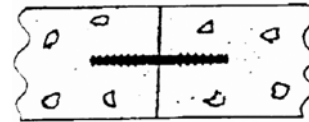


Ribbed Flat Waterstop

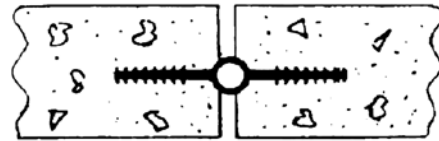


Ribbed with Center Bulb Waterstop

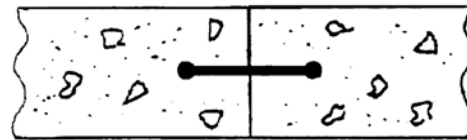

Dumbbell Waterstop

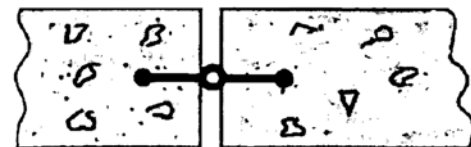

Dumbbell with Center Bulb Waterstop

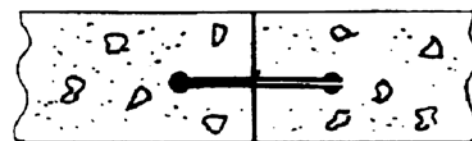

Split Waterstop